



WASJ

SMA to 7.0mm

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC~18GHz
VSWR: 1.25 max.
Impedance: 50Ω


Mechanical

RF Connectors: SMA
7.0mm
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated Stainless Steel
Dielectric: PEI & PTFE
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+165°C

Outline Drawings

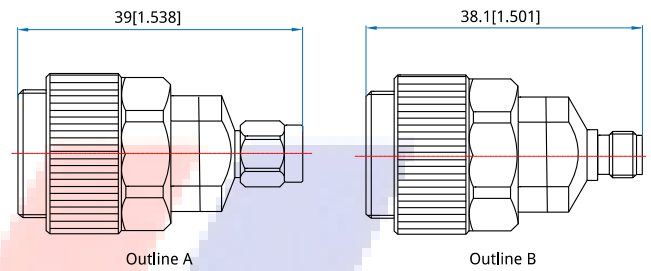

Unit: mm [in]
Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

WASJ-M - SMA(m) to 7.0mm, Outline A

WASJ-F - SMA(f) to 7.0mm, Outline B

Customization is available upon request.