



WAST SMA to TNC

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	DC~18GHz
VSWR:	1.2max.
VSWR:	1.25max. (Outline E)
VSWR:	1.3max. (Outline F)
Impedance:	50Ω

Mechanical

RF Connectors:	SMA TNC
Outer Conductor:	Passivated stainless steel Passivated SUS303 stainless steel. (Outline E)
Dielectric:	PEI & PTFE or PTFE
Inner Conductor:	Gold plated beryllium copper

Environmental


Temperature:	-50~+85°C -55~+165°C(bulk head)
--------------	------------------------------------

How To Order

- WAST-MM** - SMA (m) to TNC (m), Outline A
- WAST-MF** - SMA (m) to TNC (f), Outline B
- WAST-FM** - SMA (f) to TNC (m), Outline C
- WAST-FF** - SMA (f) to TNC (f), Outline D
- WASTL-FF** - SMA (f) to TNC (f), Flange mount, Outline E
- WASTH-FF** - SMA (f) to TNC (f), Bulk head, Outline F

Customization is available upon request.

Outline Drawings

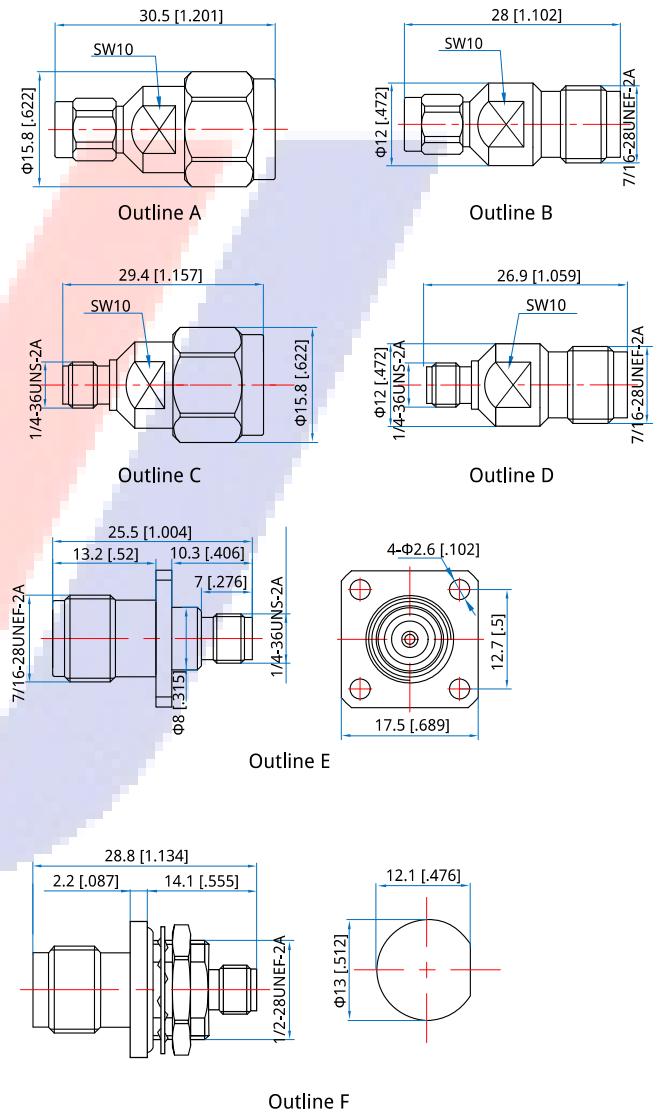

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]