



WATN

TNC to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~18GHz
VSWR: 1.2 max.
Impedance: 50Ω


Mechanical

RF Connectors: TNC
N
Outer Conductor: Stainless steel
Dielectric: PEI
PEI&PTFE(QATN-FM/QATN-FF)
Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -55~+165°C

Outline Drawings

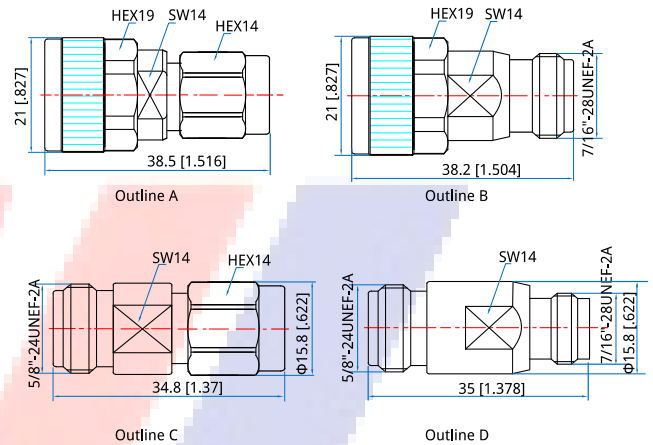

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

- WATN-MM** - TNC(m) to N(m), Outline A
- WATN-MF** - TNC(m) to N(f), Outline B
- WATN-FM** - TNC(f) to N(m), Outline C
- WATN-FF** - TNC(f) to N(f), Outline D

Customization is available upon request.