




# WASX

## SMA to MMCX

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

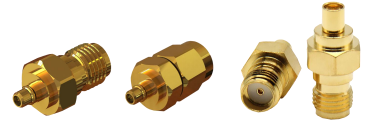

### Electrical

Frequency: DC~6GHz  
VSWR: 1.2 max.  
Impedance: 50Ω


### Mechanical

RF Connectors: SMA  
MMCX  
Mating Life Cycle: 500 cycles  
Outer Conductor: Gold plated brass  
Dielectric: PTFE  
Inner Conductor: Gold Plated Beryllium Copper

### Environmental

Temperature: -55~+165°C

### Outline Drawings

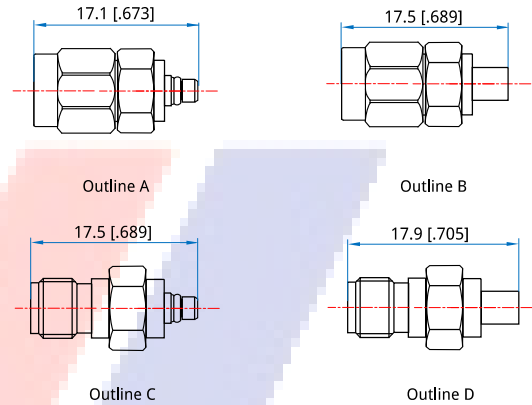

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

### How To Order

- WASX-MM** - SMA(m) to MMCX(m), Outline A
- WASX-MF** - SMA(m) to MMCX(f), Outline B
- WASX-FM** - SMA(f) to MMCX(m), Outline C
- WASX-FF** - SMA(f) to MMCX(f), Outline D

Customization is available upon request.