



## WPD2-30-512-K2-S

2-Way, 0.03~0.512GHz

Features:  
\* Small Size  
\* Low Insertion Loss

Applications:  
\* Amplifiers  
\* Mixers  
\* Antennas  
\* Laboratory Test

### Electrical

Frequency:	0.03~0.512GHz
Insertion Loss:	0.5dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.3 max.
Isolation:	20dB min.
Amplitude Balance:	0.2dB max.
Phase Balance:	5° max.
Impedance:	50Ω
Power @SUM Port:	200W max. as divider 200W max. as combiner

### Mechanical

Size <sup>*1</sup> :	80*60*22mm 3.15*2.362*0.866in
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole


[1] Exclude connectors.

### How To Order

**WPD2-30-512-K2-S**

Customization is available upon request.

### Outline Drawings

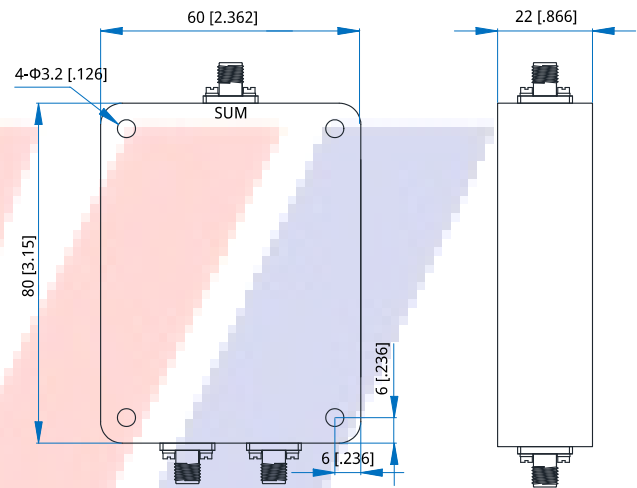

Unit: mm [in]  
Tolerance: ±0.5mm [±0.02in]