



# WPD2-400-8000-30-S

2-Way, 0.4~8GHz

Features:  
\* Small Size  
\* Low Insertion Loss

Applications:  
\* Amplifiers  
\* Mixers  
\* Antennas  
\* Laboratory Test

### Electrical

Frequency:	0.4~8GHz
Insertion Loss:	1.5dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.2 max.
Isolation:	18dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	±3°
Impedance:	50Ω
Power @SUM Port:	30W max. as divider 2W max. as combiner

### Mechanical


Size <sup>*1</sup> :	74*35*12mm 2.913*1.378*0.472in
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

### Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

### Outline Drawings

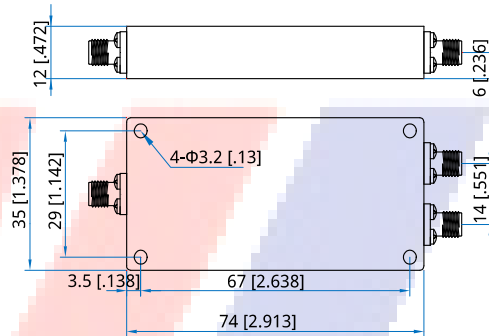

Unit: mm [in]  
Tolerance: ±0.5mm [±0.02in]

### How To Order

**WPD2-400-8000-30-S**

Customization is available upon request.