



## WPD2-380-410-K3-N

2-Way, 0.38~0.41GHz

### Features:

- \* Small Size
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

### Electrical

Frequency:	0.38~0.41GHz
Insertion Loss:	0.3dB max.
Input VSWR:	1.2 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	0.2dB max.
Phase Balance:	±2°
Impedance:	50Ω
Power @SUM Port:	300W max. as divider 80W max. as combiner

### Mechanical


Size <sup>*1</sup> :	152*80*22mm 5.984*3.15*0.866in
Weight:	800g
Connectors:	N Female
Mounting:	4-Φ4.4mm through-hole

[1] Exclude connectors.

### Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

### Outline Drawings

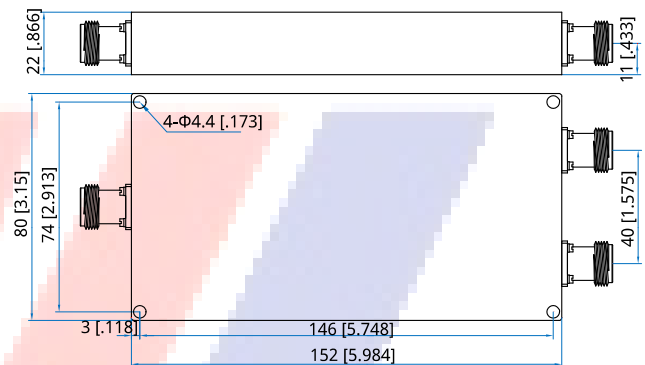

Unit: mm [in]  
Tolerance: ±0.5mm [±0.02in]

### How To Order

**WPD2-380-410-K3-N**

Customization is available upon request.