



WPD2-380-8000-30-S

2-Way, 0.38~8GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.38~8GHz
Insertion Loss:	1.6dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.2 max.
Isolation:	18dB min.
Amplitude Balance:	±0.3dB
Phase Balance:	±3°
Impedance:	50Ω
Power @SUM Port:	30W max. as divider 1W max. as combiner

Mechanical


Size ^{*1} :	78*28*10mm 3.071*1.102*0.394in
Weight:	200g
Connectors:	SMA Female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

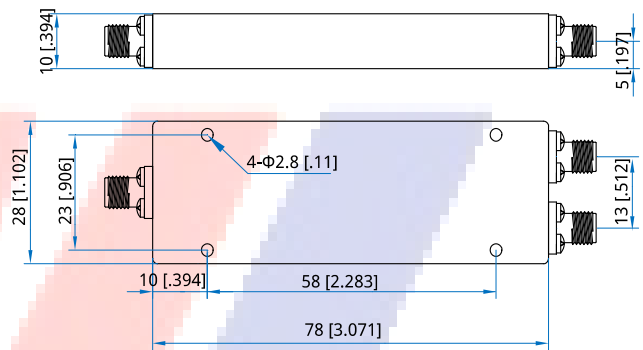

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

WPD2-380-8000-30-S

Customization is available upon request.